

**Soundweb™ 9010
Installation Guide**



Regulatory Information

v1.0 PW/JMK 21st March 1999

An example of this equipment has been tested and found to comply with the following European and international Standards for Electromagnetic Compatibility (only when used with a metal wallbox).

Radiated Emissions (EU): EN55022 (1990) Associated Equip.
 Immunity (EU): EN50082/1 (1992) RF Immunity, Fast Transients ESD

Radiated Emissions (USA): FCC part 15 Class A



Important safety information - read and follow

It should not be necessary to remove any protective earth or signal cable shield connections to prevent ground loops. Any such disconnections are outside the recommended practice of BSS Audio, and will render the EMC certificate void.


We have written this guide with the aim of helping installers and sound engineers alike to get the most out of the 9010. We recommend that you read this manual, particularly the section on installation, before attempting to operate the unit.

We welcome any comments or questions regarding the 9010 or other BSS products, and you may contact us at the address or World Wide Web site given in the warranty section.

Mechanical Installation

The 9010 is designed to fit into a standard 3-gang US wallbox. Screws are provided to fix the unit in place. An optional bezel is available to 'dress' the edges of the panel if required.

Dimensions of the unit are shown below. BSS recommend the use of a metal wall box to ensure that the installation meets necessary EMC standards. If you require suitable wallboxes, contact your distributor for part Z-010-BOX.

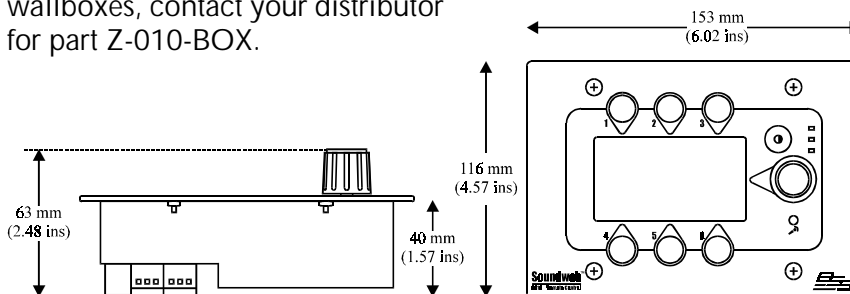

Front panel details

Display Contrast button

This is used to optimise the contrast of the display. Press and hold the contrast button to adjust. If you go past the optimum setting, keep holding the button so that adjustment starts from the beginning again.

Backlit graphics display

The details displayed are specified by the Soundweb Designer software.



Six push buttons

As with the rotary control, the operation of these are determined by the Soundweb Designer software.

Microphone

The built-in microphone may be used for paging etc. The routing of the signal from the microphone is determined by the Soundweb Designer software.

Rotary control

Used to adjust parameter values. The function of this control is determined entirely by the Soundweb Designer software.

Rear panel details

Network In/Out*

Network In - connects to the *Network Out* socket on another unit. Connecting multiple units is done in the same way - *In* to *Out*.

Refer to the 9088 installation guide and Soundweb Designer help for further details.

The connecting cable is CAT. 5 network cable, terminated with RJ45 connectors, with all 8 cores wired straight through.

Note that the twisted pairs in any CAT.5 network cable must be wired to the following pin pairs at each terminal:

- 1 (White-Orange) with 2 (Orange); 3 (White-Green) with 6 (Green);
- 4 (Blue) with 5 (White-Blue); 7 (White-Brown) with 8 (Brown)

Power/Mic/Logic screw terminal block*

Power In


DC power input (+24V and Gnd). See Power section.

Logic In

Used to connect a switch, (eg: a push-to-talk switch) to the 9010. This input is internally 'pulled up' to +5V DC via a 4.7kOhm resistor, so no external voltage source is needed. A common (ground) connection is provided. A switch may be connected between the input and common, as shown below.

Mic -,+,S

Three connections for an external dynamic microphone (-,+,S).

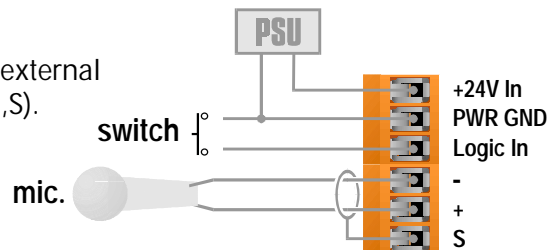


Serial Port*

Aux RS232

This is for connection to a PC if required.


The 10-pin header is arranged so that a standard IDC ribbon cable will pin-out to an IDC D connector for standard PC RS232 connection.

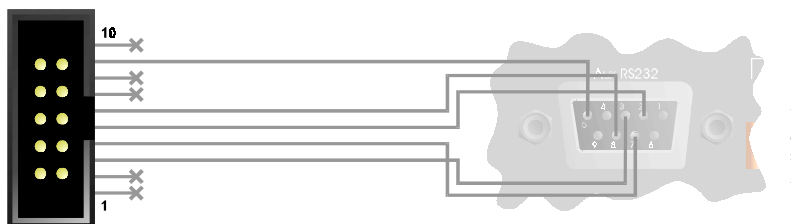

Expansion Port*

Left/Right/Audio Gnd output

An unbalanced line-level feed for use in custom applications for monitoring etc. Note that the outputs are polarity inverted so that external inverting amplifiers may be used. The signal on these outputs is determined by the Soundweb Designer software.

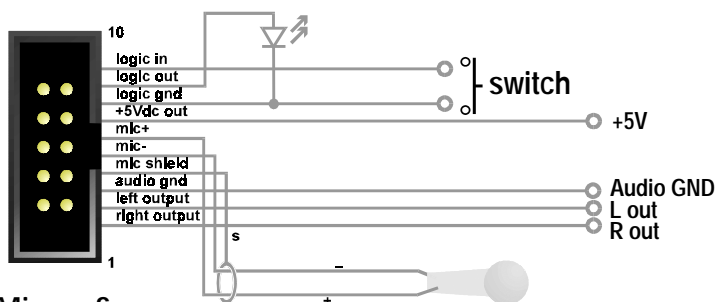

Mic -,+,S

Commoned to the Mic In terminals on the Power/Mic/Logic screw terminal block.

+5Vdc Out

A low current regulated +5V output for supplying power to electronics for custom applications. No more than 100mA may be drawn. Current drawn from this output will impact the length of network cable that may be used between the power supply and the 9010.

Logic in

Commoned to the Logic In terminal on the Power/Mic/Logic screw terminal block.


Logic Out

Used to connect the 9010 to a 'tally' indicator LED etc. The logic output produces 0V or +5V DC via an internal 440 Ohm resistor. A common ground connection is provided. An LED connected between the output (Anode, A) and ground (Cathode, K) will illuminate when the logic output is activated, without requiring any external current limiting resistor.


Connecting to a power supply

If using the 9010 unit without a 9011 power interface, the network and 9010 should be connected in the following fashion:

**refer to label on back of unit for connection positions.*

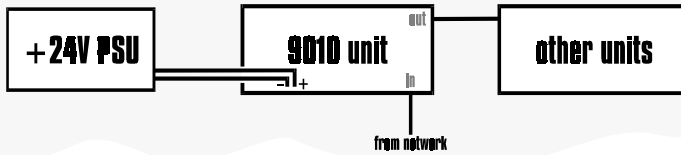

When using the 9010 unit with a 9011 power interface, connect as follows:

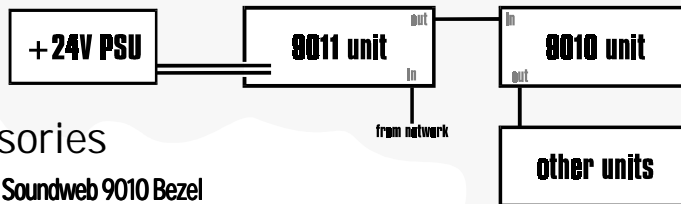

Accessories

Z-010-BEZEL Soundweb 9010 Bezel

A sculptured plastic surround for the panel of the 9010 to 'dress' the panel edges for more elegant presentation.

Z-999-PSU Soundweb Power supply kit

A 24Vdc universal input power supply suitable for powering up to four 9010's. This is a free-standing unit with integral IEC power inlet.

Z-010-BOX Soundweb 9010 wallbox

A standard U.S. 3-gang outlet wallbox suitable for housing the 9010 in an installation.

Z-SW9011 Soundweb Power Interface

Allows DC power from a power supply to be injected into the network cable feeding the 9010(s).

Technical specifications

External Microphone Input

Frequency response (+-1dB)	20Hz to 20KHz
THD	0.05% (20Hz to 20KHz, +10dBu output)
Dynamic range	80dB typ. (22Hz to 22KHz unweighted)
Gain control range	34 to 72dB
Maximum input level	-20dBu
Input impedance	2k Ohm
Equivalent Input Noise	-106dBu @150 Ohm

Audio Outputs

Frequency response (+-1dB)	20Hz to 20KHz
THD	<0.05% (20Hz to 20KHz, 0dBu output)
Dynamic range	88dB typ. (22Hz to 22KHz unweighted)
Maximum output level	+4dBu
Output impedance	220 Ohm

Note - polarity is inverted to allow external headphone amplifier or line driver to be inverting.

Control Ports

Logic output voltage	0 or +5V unloaded
Logic output impedance	440 Ohm
Control input impedance	4.7kOhms to +5V

General

Maximum network cable length	300m/1000ft
Power consumption	<5VA (<200mA at 24V DC)