


## OMNI-VD-660

4K60 MWC/Dante AV-A & 1080p H.26x  
Multi-Codec Decoder

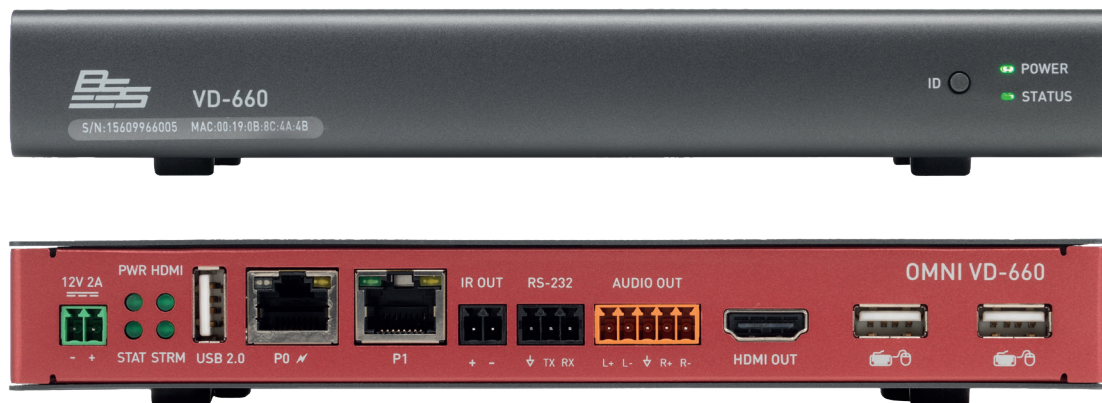

The BSS OMNI-VD-660 is an AV-over-IP decoder for distributing 4K60 4:4:4 video, audio, control, and USB 2.0 signals over Gigabit Ethernet, in environments ranging from classrooms and meeting rooms to courtrooms, hospitality venues, and large enterprise or government facilities.

At the core of the OMNI-VD-660 is the Motion Wavelet Compression (MWC) codec, engineered for pristine visual quality and ultra-low encode to decode latency with fast-motion video, high-detail graphics, and dynamic visual content. Additionally, the OMNI-VE-660 features standards-based 1080p H.264 or H.265 decoding, for receiving bandwidth-efficient streams from third-party devices or platforms, or compatible OMNI networked AV encoders over WANs or shared networks.

The OMNI-VD-660 features USB 2.0 routing and extension through Virtual Network USB 2.0 Hub technology. A host PC, connected to an OMNI 600 encoder, can communicate with USB devices located at up to four OMNI-VD-660 decoders, supporting USB 2.0 data rates up to 480 Mbps. This capability allows host PCs to interface with cameras, conferencing bars, touch displays, HID peripherals, and other devices at remote locations across the network.

Along with high-performance networked AV distribution, the OMNI-VD-660 is Dante AV-A enabled for interoperability with third-party Dante AV-A encoders. Integrators can configure and manage OMNI 600 systems using Dante Controller, Dante Domain Manager, and Dante Director. In addition, this decoder supports two-channel Dante audio input and output.

The OMNI-VD-660 is designed for modern professional AV installations, with essential integration features including PoE+ remote powering, a low-power standby mode, video stream preview, custom image and slideshow presentations, open APIs for third-party control, 4K video scaling, and video wall processing.

## | FEATURE HIGHLIGHTS

- AV-over-IP decoder for 4K60 4:4:4 video, audio, control, and USB 2.0 over Gigabit Ethernet
- High-performance MWC codec delivers pristine-quality video with ultra-low latency
- Standards-based 1080p H.264 or H.265 decoding
- Virtual Network USB 2.0 Hub for routing between a USB host and devices at up to four remote locations
- Dante AV-A enables interoperability with third-party networked AV encoders, plus system management from Dante Controller, Dante Domain Manager, and Dante Director
- Two-channel Dante audio input and output (2x2)
- Video preview from the built-in web interface or a touch panel
- Supports custom image and slideshow presentations
- Enhance video presentations with 4K video scaling, seamless switching, and video wall processing
- PoE+ powered with low-power (standby) mode to conserve energy
- Enterprise-grade network security and standards including IEEE 802.1x, HTTPS, TLS, AES-256 encryption, LDAP, VLAN tagging, and QoS
- AVX Suite for OMNI 600 system configuration and management
- HARMAN HControl and BSS Direct Control provide open APIs for third-party integration
- UL2043 certification for plenum space installation

## | GENERAL SPECIFICATIONS

MWC VIDEO	
Digital Video Output	HDMI 2.0
Formats	Dante AV-A, HDMI 2.0, HDCP 2.3
HDR	HDR, HDR10, HDR10+
Output Resolutions Supported	480p, 720p, 1080p, 1200p, 1440p, and 4K *See Appendix in manual
Output Refresh Rates Supported	30, 50, and 60
Color Space	4:4:4, 4:2:2, RGB
LocalPlay	8 playlists
Video Wall Construction (MWC Only)	Supported up to 16x16
H.264/H.265 VIDEO	
<b>DOES NOT SUPPORT HDCP</b>	
Video Resolutions Supported	720p or 1080p *Scaler has no effect on H.26x
Video Refresh Rates Supported	30 or 60 Hz
H.26x Profiles	Baseline (BP), Main (MP), High (HiP)
Bitrate Range	500 kbps to 50 Mbps
Rate Control	CBR *CBR has a tolerance of +/-10%
Receiving Streaming Protocols Supported	RTP, RTSP, RTMP, RTMPS, UDP

## | GENERAL SPECIFICATIONS

AUDIO	
Input Signal Types	PCM or Dante
Output Signal Types	Embedded audio on HDMI, Analog, or Dante
HDMI Audio Channels	8ch
Analog Audio Channels	2ch
Dante Audio Channels	2ch
Dante Audio Sample Rate	44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz
Audio Breakaway	Supported
KEYBOARD AND MOUSE	
Keyboard & Mouse	Connect the decoder to the keyboard and mouse and an OMNI 600 Series, OMNI 200 Series, or AMX N2600 Series Encoder.
USB 2.0	
USB Data	Connect a USB 2.0 device such as a web camera, audio device, or any USB 2.0 device to the OMNI-VD-660. Route the OMNI-VD-660 to an OMNI-UE-210, OMNI-VE-630-WP, OMNI-VE-660, or AMX SVSI N2600 encoder.
LATENCY	
Latency	<2 ms Scaling adds one frame of latency
Video/Audio Switching Stream-to-Stream	Near Seamless with recommended settings
USB Switching Stream-to-Stream	Dependent upon the Host Computer and Device *Can take several seconds to negotiate
COMMUNICATIONS	
Ethernet	10/100/1000 Mbps, auto-negotiating, auto-sensing, full/half duplex, DHCP and Static IP
*Note	Jumbo Frames Required
HDMI	HDCP, EDID management
PORTS	
+12V 2A (Female)	2-pin terminal Phoenix connector
USB-A USB 2.0 (Female)	USB 2.0 Device Connection
P0 PoE+ (Female)	10/100/1000Base-T Ethernet Port Provides network connection, network audio/video/USB, and power
P1 (Female)	10/100/1000Base-T Ethernet Port *See Manual for different configurations
IR OUT (Female)	2-pin terminal Phoenix connector *IR Emitter (Not Included)
RS232 (Female)	3-pin terminal Phoenix connector
AUDIO OUT (Female)	5-pin terminal Phoenix connector
HDMI OUT (Female)	Video Output
USB-A KVM (Female) x2	KVM Device Connections

## GENERAL SPECIFICATIONS

CONTROLS AND INDICATORS - FRONT	
<b>ID Button</b>	<p>Recessed pushbutton</p> <p>Press less than 4 seconds to send a network notification to identify the unit (the notification causes a pop-up dialog in AVX NAV Router to appear).</p> <p>Holding the button between 7 and 20 seconds and releasing will cause the device to enable the On-Screen Display (OSD).</p> <p>Holding the button for 30 seconds and releasing will cause the device to return to factory configuration.</p>
<b>POWER LED</b>	On (green) when operating power is supplied
<b>STATUS LED</b>	On (green) when there is software activity
<b>STREAM LED</b>	On (green) when the unit is receiving streaming video
<b>HDMI LED</b>	On (green) when the unit is communicating with a display
POWER SUPPLY	
<b>Power Supply, External, Optional</b>	<p>2.0 Amp @ 12 Volts DC; 100-240 Volts AC power supply</p> <p>*Not Included</p>
<b>Power over Ethernet (PoE+)</b>	<p>Can be powered via a PoE+ switch or other equipment with a PoE+ source. Conforms to IEEE 802.3at Class 4 (802.3at Type 2)</p> <p>NOTE: For the unit to receive Power over Ethernet (PoE+), it must be connected to a switch or other equipment that has a PoE+ PSE (Power Sourcing Equipment) port</p> <p>Currently the device relies on a 1-event, Type 2, OSI Layer-1 negotiation for power.</p> <p>WARNING: Do not run wiring connected to a PoE+ PSE port outside of the building where the PSE resides. It is for intra-building use only</p>
INCLUDED ACCESSORIES	
Qty.	Description
2	Painted L-Brackets
4 (M3 x 7 mm) Panhead Philips Screw	#1 Philips Tip, used to attach L-Brackets to the device
ENVIRONMENTAL	
<b>Temperature</b>	32° to 104°F (0° to 40°C)
<b>Humidity</b>	10% to 90% RH (non-condensing)
<b>Heat Dissipation</b>	85 BTU/hr
GENERAL	
<b>Product Dimensions (HWD)</b>	1 1/8" x 7 7/8" x 6 3/4" (26.6 mm x 200 mm x 172 mm)
<b>Product Weight</b>	2.56 lbs (Approx. 1.16 kg)
<b>Shipping Weight</b>	3.17 lbs (Approx. 1.44 kg)
<b>Regulatory Compliance</b>	FCC, CE, KCC, UKCA, and UL (Including 2043)
<b>SKU</b>	BSS-VD660

